


Coaxial cables for video signal transmission, Al/Pet tape and tinned copper braid shield, low halogens emission

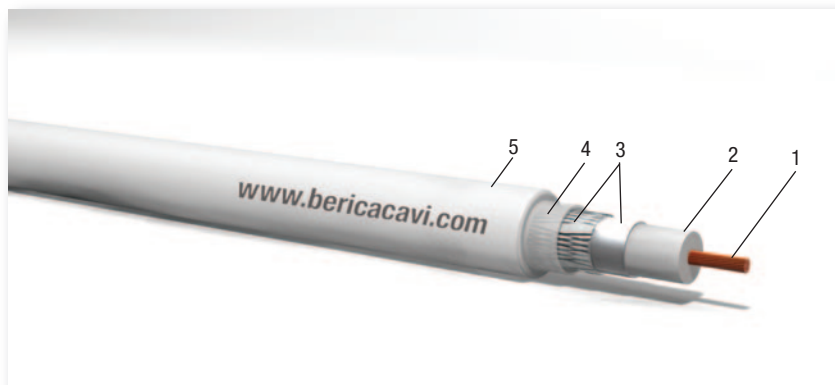

1. Conductor
2. Insulation
3. Shield
4. Assembling
5. Sheath

APPLICATION: Suitable for the connection between camera and recorder in the closed circuit television systems.

INSTALLATION: For fixed indoor installation, without protection or in pipes and similar closed systems.

FEATURES	DESCRIPTION	STANDARD
Conductor :	annealed red copper (7x0,16 mm)	
Insulation :	low density polyethylene LDPE	
Shield :	nastro Al/Pet/Al braid of annealed tinned copper	
Assembling :	Pet tape	
Sheath :	PVC TM2 quality	
Low halogens emission :	(< 22%)	CEI EN 50267-2-1 IEC 60754-1
Sheath colour :	white RAL 9010	
Bending radius :	Ø x 14	

ATTENUATION								
MHz	50	100	200	400	800	1000	1350	1750
dB/100 m	13,2	17,9	23,5	36,7	57,3	69,6	73,3	86,5

TYPE	MEDIUM Ø OUTER mm	MEDIUM WEIGHT kg/km	PRODUCT CODE
MINICOAX	3,5	20,0	B40MINICOAX