


Coaxial cables for video signal transmission, Al/Pet tape and aluminum braid shield, low halogens emission.

CPR
EU 305/2011

Eca

1. Conductor
2. Insulation
3. Screen
4. Assembling
5. Sheath

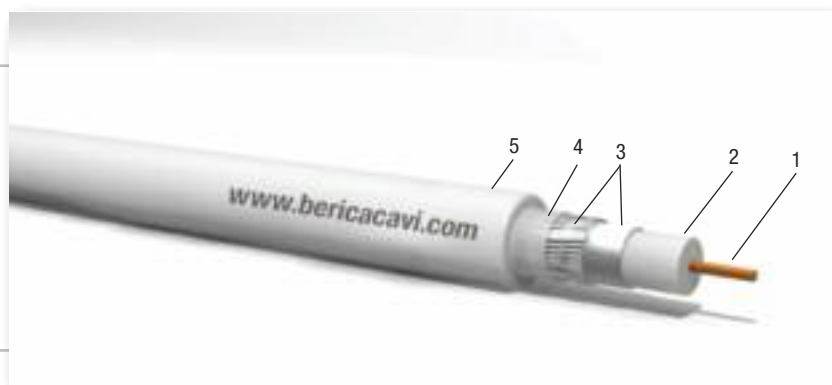

APPLICATION: Suitable for the connection between camera and recorder in a closed-circuit television systems. Installations not provided by upper and lower classes where there is no risk of fire or danger to people and / or people things (**Low risk installed individually**)

INSTALLATION: For fixed indoor installation, without protection or in pipes, conduits and similar closed systems.

FEATURES	DESCRIPTION	STANDARDS
Conductor:	copperweld 1,02 mm	
Insulation:	polyethylene foam	
Shield:	Al/Pet tape braid of aluminum wire	
Assembling:	Pet tape	
Sheath:	PVC, TM2 quality	
Low halogens emission:	(< 22%)	CEI EN 50267-2-1 IEC 60754-1
Sheath colour:	white RAL 9010	
Bending radius:	Ø x 14	
REGULATION (UE) 305/2011		
System AVCP:	3	EN 50575:2014 + A1:2016
Classification:	Eca	UNI EN 13501-6
Eca:	Flame propagation (H ≤ 425 mm)	EN 60332-1-2
Printing:	No printing	

ATTENUATION							
MHz	5	50	100	200	400	800	1000
dB/100 m	3,2	10,4	14,8	22,0	32,3	49,7	58,1

TYPE	MEDIUM Ø OUTER mm	MEDIUM WEIGHT kg/km	PRODUCT CODE
RG 6	7,1	40,0	B40ERG6