

UTP-FTP 4x2x23 AWG CAT. 6 BLUE FOR OUTDOOR




www.bericacavi.com

Data transmission cables, flame retardant, with low halogens emission and UV resistant.

CEI UNEL
36762

1. Cross
2. Conductor
3. Insulation
4. Assembling
5. Drain wire
6. Screen
7. Inner sheath
8. Outer sheath

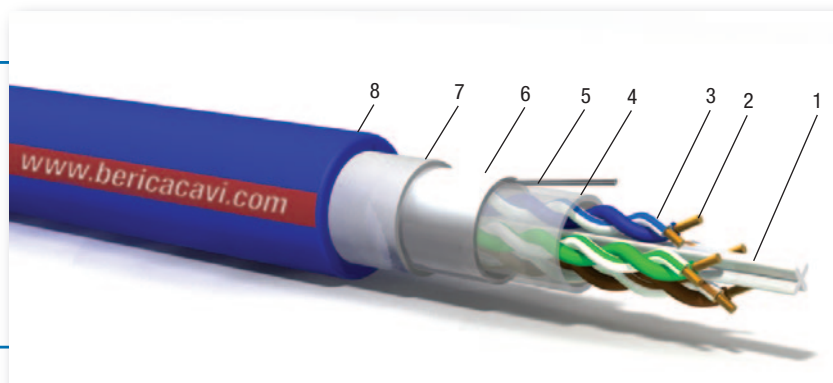

APPLICATION: Used for data transmission up to 250 MHz in structured cabling systems LAN (CEI EN 50173 class E), that require more protection against the elements and in particular ultraviolet rays.

INSTALLATION: For fixed indoor and outdoor installation. They can be installed on platforms, pipes, conduits and similar systems. They can be laid together with power cables with marking both 450/750V and 0.6 / 1 kV used for systems with a nominal voltage to ground (U₀) up to 400 V.

VARIANT: With supply pair.

FEATURES	DESCRIPTION	STANDARD
Conductor :	annealed red copper (23AWG)	
Insulation :	low density polyethylene LDPE	
Cores colour :	with blue/blue - white/orange/orange - with green/green - white/brown/brown	
Cross:	cross polyethylene separator	
Assembling:	Pet tape	
Drain wire:	annealed tinned copper	
Screen :	Al/Pet tape	
Inner sheath :	PVC	CEI EN 50363
Outer sheath :	PVC quality RZ	CEI EN 50363
Outer sheath colour :	blue RAL 5015 with red line RAL 3000	
Flame retardant :		CEI EN 60332-1-2
Low halogens emission :	(< 22%)	CEI EN 50267-2-1 - IEC 60754-1
Oil resistant :		CEI 20-34/0-1
UV resistant :		HD 605
DC resistance :	< 190 Ω/km (loop)	CEI EN 50288-5-1/6-1
Impedance :	100 ± 5Ω at 100 MHz	
Testing voltage :	700 Vac x 1 min.	
Max working temperature :	70 °C	
Min. installation temperature :	0 °C	
Bending radius :	Ø x 8	
Printing :	BERICA CAVI S.P.A. ITALY UV RESISTANT Type CEI UNEL 36762 C-4 (U ₀ =400 V) 100 OHM CE Year/Lot - 00000 m.	

	Mhz	4	20	62,5	100	155	200	250
Attenuation:	dB/100 m	3,8	8,5	15,5	19,9	25,3	29,1	33,0
NEXT:	dB/100 m	65,3	54,8	47,4	44,3	41,4	39,8	38,3
Return loss:	dB/100 m	24,5	25,0	21,5	20,1	18,8	18,0	17,3

TYPE	MEDIUM Ø OUTER mm	MEDIUM WEIGHT kg/km	PRODUCT CODE
UTP 4x2x23AWG	8,2	76,0	B7304CA24BLU
FTP 4x2x23AWG	9,3	92,0	B7404CA24BLU